


# D200 MiniPOS

Contactless, EMV Chip, Magstripe | PCI  
PTS 4.x SRED | Color Touch Screen | iOS  
& Android Compatible | WCDMA, GPRS,  
Bluetooth, WiFi | Apple MFi approved

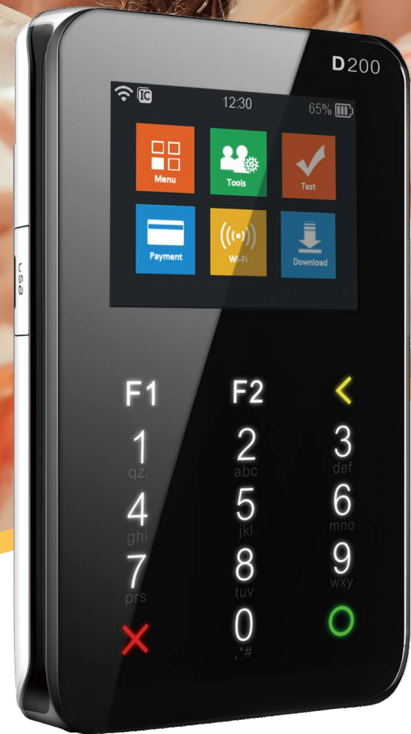

PAX's beautifully designed D200 is a standalone MiniPOS with WiFi, 3G, 2G or cable connection. It can also be integrated with any mobile payment app running on iOS or Android smart device via Bluetooth, functioning as a traditional mPOS. The D200 offers PCI PTS 4.x, SRED and Visa PayWave & MasterCard Contactless certification.

Apple Inc. has given the D200 a special certification called MFi meaning that Apple has tested and approved the D200 to meet the highest performance standards for integration with any iPad or iPhone.

# FEATURES & BENEFITS

## Reliability & Security

- Optional colour touchscreen with user friendly interface
- Featuring innovative touch-press key design
- Contactless, EMV chip & magstripe enabled
- Secure key embedded area
- PCI PTS 4.x, SRED

## Flexible Platform

- Stylishly designed for comfort and convenience
- USB port for high speed data transmission
- Optional multiple connectivity
- Versatile operating system
- Large memory capacity



# D200 Mini POS

## SPECIFICATIONS

<b>OS</b>	Prolin
<b>Processor</b>	32-bit ARM 11
<b>Memory</b>	64MB SDRAM + 128MB Flash
<b>Card Readers</b>	Magnetic Card Reader   Smart Card Reader   Contactless Card Reader
<b>Display</b>	2.4-inch TFT Colour Display   320 x 240 pixels Touchscreen (optional)
<b>Audio</b>	1 x Buzzer
<b>Keypad</b>	1 x Numeric   5 x Function Keys   Touch-button Input
<b>Communications</b>	WiFi (2.4G)(optional)   3G (WCDMA)(optional)   2G (GPRS) (optional) Bluetooth 4.0 & 2.1
<b>Card Slots</b>	1 x SAM   1 x SIM + 1 x SAM
<b>Peripheral Ports</b>	1 x Micro USB 2.0   1 x RS232
<b>Battery</b>	3.7V / 1900mAh Rechargeable Li-ion Battery
<b>Adapter</b>	Input: 100 - 240V AC, 50Hz / 60Hz   Output: 5.0V DC, 1.0A
<b>Physical</b>	L x W x H (mm) : 121 x 72 x 22.5   Weight (g) : 165 (Including Battery)
<b>Environmental</b>	0°C ~ 50°C (32°F ~ 122°F) Operating Temperature -20°C ~ 70°C (-4°F ~ 158°F) Storage Temperature 10% ~ 93% Relative Humidity, Non-condensing
<b>Certifications</b>	PCI PTS 5.x, SRED   EMV L1 & L2   EMV Contactless L1   Visa payWave MasterCard Contactless   American ExpressPay   Discover D-PAS MasterCard TQM   J/Speedy L2   Mastercard mPOS   PTCRB   ABECS APCA   CE   FCC   Anatel   RoHS   IC

